

LUMILUX T2 FM

Tubular fluorescent lamps 7 mm



- Offices
- Museums
- Shops
- Supermarkets and department stores
- Industry (e.g. furniture industry)
- Restaurants



Product benefits

- Extremely economical
- Good quality of light
- Excellent luminous flux
- Extra slim and compact fluorescent lamp

Product features

- Good average life time (with OSRAM ECG)
- Tube diameter: 7.0 mm



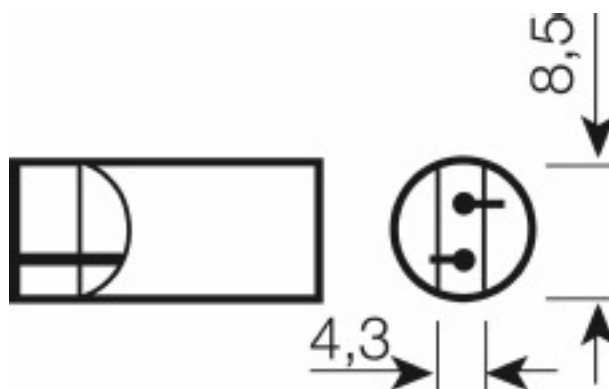

Product line drawing with letters

13 W/730 W4.3 | 6 W/730 W4.3 | 6 W/740 | 6 W/760 W4.3 |
8 W/730 | 8 W/760 W4.3 | 8 W/740 | 11 W/730 W4.3 | 11
W/740 | 11 W/760 W4.3 | 13 W/740 | 13 W/760 W4.3

Base

13 W/730 W4.3 | 6 W/730 W4.3 | 6 W/740 | 6 W/760 W4.3 |
8 W/730 | 8 W/760 W4.3 | 8 W/740 | 11 W/730 W4.3 | 11
W/740 | 11 W/760 W4.3 | 13 W/740 | 13 W/760 W4.3

Technical data

Product description	Nominal wattage	Rated color rendering index Ra	Rated color temperature	Light color as per EN 12464-1	Base (standard designation)	Tube diameter
13 W/730 W4.3	13 W	80	3000 K	Warm White	W4.3x8.5d	7 mm
6 W/730 W4.3	6 W	80	3000 K	Warm White	W4.3x8.5d	7 mm
6 W/740	6 W	80	4100 K	Cool White	W4.3x8.5d	7 mm
6 W/760 W4.3	6 W			Cool Daylight	W4.3x8.5d	7 mm
8 W/730	8 W	80	3000 K	Warm White	W4.3x8.5d	7 mm
8 W/760 W4.3	8 W			Cool Daylight	W4.3x8.5d	7 mm
8 W/740	8 W	80	4100 K	Cool White	W4.3x8.5d	7 mm
11 W/730 W4.3	11 W	80	3000 K	Warm White	W4.3x8.5d	7 mm
11 W/740	11 W	80	4100 K	Cool White	W4.3x8.5d	7 mm
11 W/760 W4.3	11 W			Cool Daylight	W4.3x8.5d	7 mm
13 W/740	13 W	80	4100 K	Cool White	W4.3x8.5d	7 mm
13 W/760 W4.3	13 W			Cool Daylight	W4.3x8.5d	7 mm

Product description	Length with base excl. base pins/connection	Service life	Lifespan	Appropriate disposal acc. to WEEE	EEI – Energy Label
13 W/730 W4.3	523.10 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
6 W/730 W4.3	218.30 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
6 W/740	218.30 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B

6 W/760 W4.3	218.30 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
8 W/730	319.90 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
8 W/760 W4.3	319.90 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
8 W/740	319.90 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
11 W/730 W4.3	421.50 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
11 W/740	421.50 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
11 W/760 W4.3	421.50 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
13 W/740	523.10 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B
13 W/760 W4.3	523.10 mm	5600 h ¹⁾	8000 h ¹⁾	Yes	B

¹⁾ With preheat ECG

Equipment / Accessories

- Exclusively for operation on electronic control gears

Safety advice

In case of lamp breakage: www.osram.com/brokenlamp

Application advice

For more detailed application information and graphics please see product datasheet.

References / Links

For more information on QUICKTRONIC electronic control gear go to

- ▶ www.osram.com/QUICKTRONIC

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.