


Special H.I.D. lamps


HTQ ozone-free 30-60 W/cm

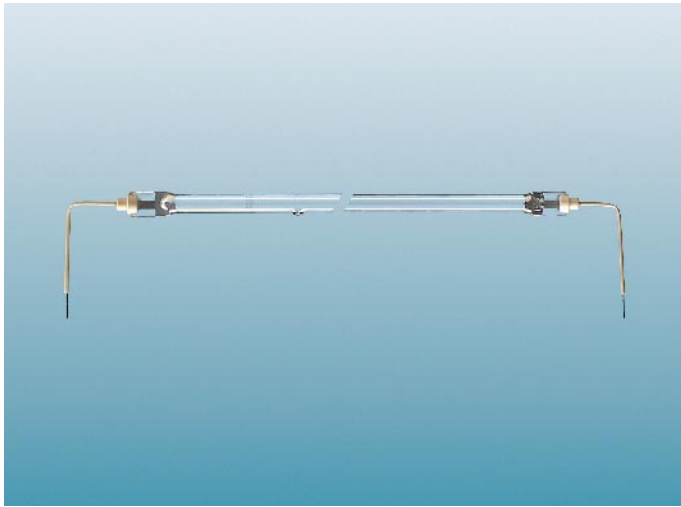

Long-arc medium-pressure high-power radiators with a double-ended quartz discharge tube containing mercury. The spectrum is comparable to HTK, with the exception that the quartz envelope blocks short-wave UV-C to prevent formation of ozone. Burning position: horizontal.


Applications

- Lacquer hardening
- Polymerisation of polyester
- Chemical processing
- Surface disinfection in the food industry

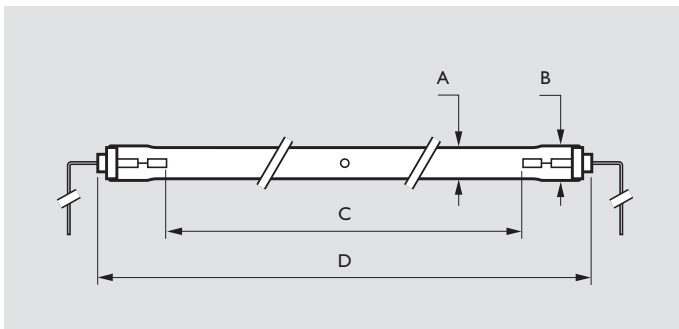

Dimensions in mm

Type	A max.	B	C	D
HTQ 7	14.5	15.0±1.0	700.0±2.0	762.5±3.0
HTQ 14	24.0	23.0±1.0	1400.0±2.0	1485.0±3.0

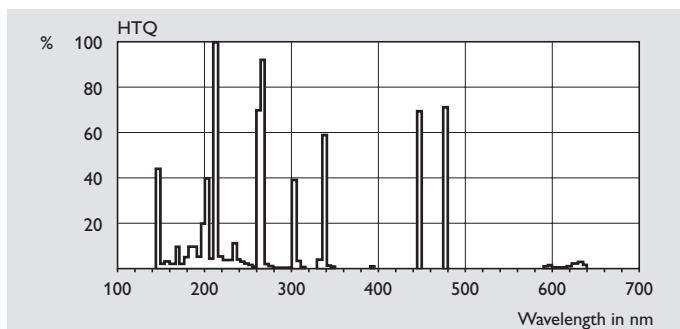

Spectral power distribution

Type	Cap/ base	Lamp wattage W	Lamp current A	Dimming	Lamp life 50% h	Maximum permissible base/pinch temperature degr:C	Maximum permissible bulb temperature degr:C	Nett weight g	Ordering number
HTQ 7	CABLE	2000	1.63	Y	1000	300	700	85	9281 875 06000
HTQ 14	CABLE	4000	3.10	Y	1000	300	700	247	9281 880 06000

